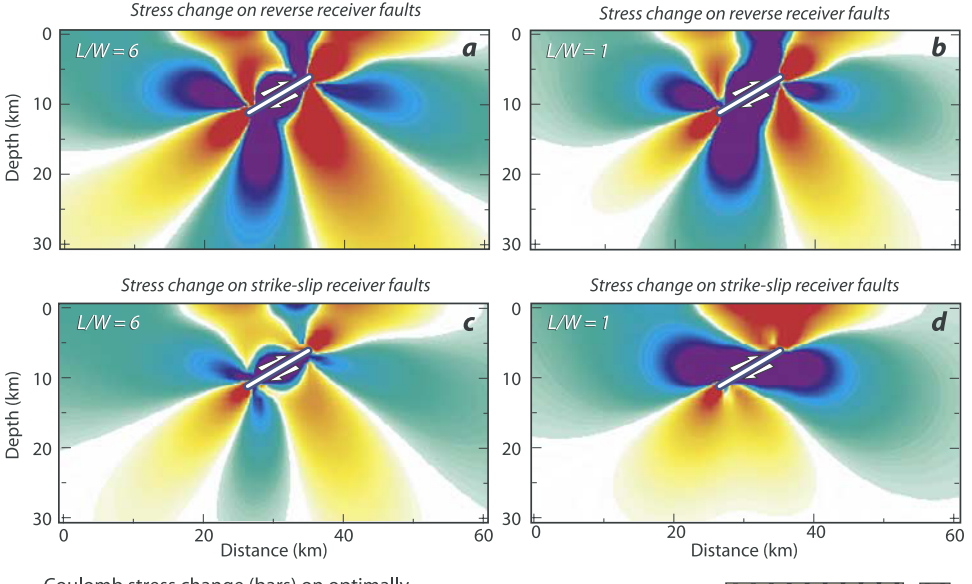
Stress change on reverse receiver faults
L/W = 6
a
Stress change on reverse receiver faults
L/W = 1
b
Stress change on strike-slip receiver faults
L/W = 6
c
Stress change on strike-slip receiver faults
L/W = 1
d
Depth (km)
0
10
20
30
0
20
40
60
Distance (km)
Coulomb stress change (bars) on optimally-oriented receiver faults with μ = 0.4
-5
0
5
L/W = 6
L/W = 1